

Super thin double-coated adhesive tape

## No.5600

### Outline


Nitto Denko No. 5600 is 0.005mm thick double-coated adhesive tape.

The tape has a #2 polyester film as a base coated on both sides with acrylic adhesive and offers superior bonding performance to plastic films and moldings.

The tape facilitates thinner electronic equipment, as tape thickness is 0.005mm.

Also, it has an excellent converting and working performance by using #2 polyester film.

### Structure

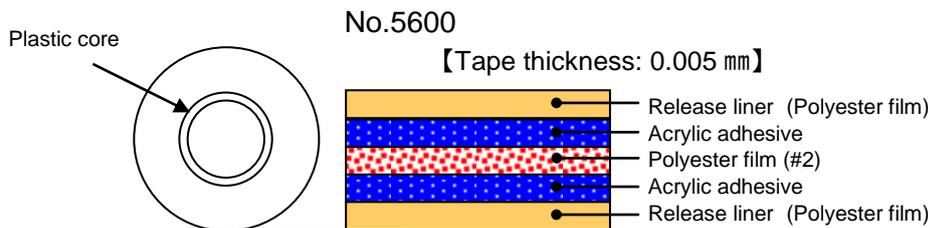

### Features

- Tape thickness is 0.005mm. Can be used for bonding in limited spaces or clearances.
- Excellent thickness uniformity by using polyester film.
- Uses thin #2 polyester film for superior conversion prior to use and offers less blocking and oozing.
- Excellent bonding performance to plastic material.
- The tape minimizes dust emission by using polyester release liner and plastic core.
- Halogen-free type. (Chloride compounds are not used for this product.)
- The six hazardous materials restricted by the RoHS directive are not compounded.

### Applications

- Fixing of reflective sheets and optical waveguide films used for LCD backlight modules such as digital camera and cellular phone.
- Fixing of film for compact electronics.
- Fixing of thin layered films, splicing and fixing for metal foil end.

### Standards size

Tape thickness (mm)	Widths (mm)	Length (m)
0.005	25 - 420	50

For more information, please contact us.

NO. 5600 10-P-0245 (1/6)

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

## Properties

---

●180° peeling adhesion by substrate

Substrate	No.5600
ABS plate	3.6
Polystyrene plate	4.4
Acrylic plate	4.0
Polycarbonate	4.8
Polyester film	4.9
Stainless steel plate (SUS304BA)	5.0
Aluminum plate	3.2
Glass plate	4.8

(Unit: N/20 mm)

Backing: PET#25

Peeling speed: 300 mm/min

Peeling angle: 180°

Pressure application condition: \*1pass back and forth with 2kg

NO. 5600 10-P-0245 (2/6)

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

## Properties

### ●180°peeling adhesion by temperature

Temperature	No.5600
10°C	3.3
23°C	5.0
40°C	4.5
60°C	3.7
80°C	3.3

(Unit: N/20 mm)

Backing: PET#25

Peeling speed: 300 mm/min

Peeling angle: 180°

Measurement temperature: 10°C, 23°C, 40°C, 60°C, 80°C,

\*Application under various temperatures

→Measurement under various temperatures

Substrate: Stainless steel plate (SUS304BA)

### ●Holding power

Temperature	No.5600
40°C	0.3

(Unit : mm/hr)


Measurement temperature: 40°C

Tape area: 10mm x 20mm

Load: 4.9N (500g)

Substrate: Bakelite plate

〈Test method〉

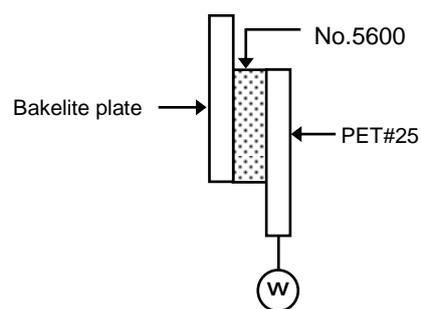

NO. 5600 10-P-0245 (3/6)

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

## Properties

### ●Shear strength

Temperature	No.5600
23°C	265

(Unit: N/20 mm x 20mm)

Substrate:Acrylic plate / Acrylic plate


Tape area: 20mm x 20mm

Peeling speed: 50 mm/min

Measurement condition: 23°C x 50%RH

Measurement method:

A specimen is prepared and shear strength is measured after allowing it to set 30 minutes.

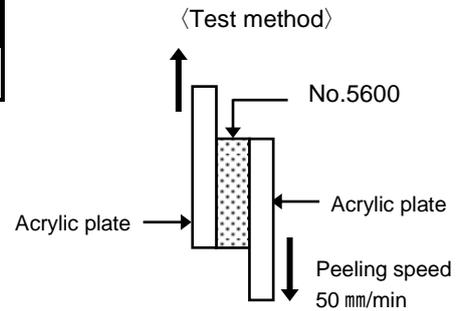

### ●180°Peeling adhesion by pressure

Pressure	No.5600
0.1kg	2.6
0.5kg	3.7
2kg	5.0
5kg	5.3

(Unit : N/20mm)

Backing: PET#25

Peeling speed: 300mm/min

Peeling speed: 180°

Measurement condition: 23°C x 50%RH

Pressure application condition

\*1 pass back with forth with 0.1 kg、0.5kg、2kg、5kg

Substrate: Stainless steel plate (SUS304BA)

NO. 5600 10-P-0245 (4/6)

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

## Properties

- 180° Peeling adhesion after application (increase)

Temperature	Time	No.5600
23°C	0.5hrs	5.0
	4hrs	5.0
	12hrs	5.1
	24hrs	5.3
	48hrs	5.4
	72hrs	5.5

(Unit : N/20mm)

Backing: PET#25

Peeling speed: 300mm/min

Peeling angle: 180°

Measurement condition: 23°C x 50%RH

Substrate: stainless steel plate (SUS304BA)

- 180° peeling adhesion (change after application)

Temperature	Time	No.5600
23°C	1day	5.3
	14days	5.8
	30days	6.4
40°C/92%RH	1day	5.3
	14days	6.3
	30days	6.6
50°C	1day	5.3
	14days	6.4
	30days	6.6
70°C	1day	5.6
	14days	6.5
	30days	6.8

(Unit : N/20mm)

Backing: PET#25

Peeling speed: 300mm/min

Peeling angle: 180°

Measurement condition: 23°C x 50%RH

Substrate: stainless steel plate (SUS304BA)

NO. 5600 10-P-0245 (5/6)

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

## Precautions when using

---

- Remove all oil, moisture and dirt from the surface of the substrate before applying.
- The tape employs pressure-sensitive adhesive. Be sure to apply pressure with a roller or press when applying. Failure to do so could affect properties or appearance.
- The tape may not adhere well to significantly uneven or distorted surfaces. Level off the surface as much as possible before applying.
- Because it is very thin, you should avoid applying large loads for at least several hours following application.

## Precautions when storing

---

- Be sure to keep the tape in its box when not using.
- Keep in a cool dark place not exposed to direct sunlight.

## Safety precautions

	<b>WARNING</b>
<ul style="list-style-type: none"><li>● Make sure the product is suitable for the application (objective and conditions) before attempting to use. The tape may come off depending on the substrate to which it is applied or conditions under which it is applied.</li><li>● Use in combination with another method of joining if there is possibility of an accident.</li></ul>	

Published in January 2018

NO. 5600 10-P-0245 (6/6)

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.